

**VILLAGE OF BAXTER ESTATES**  
**315 MAIN STREET**  
**PORT WASHINGTON, NY 11050**  
**Telephone (516) 767-0096**  
**Facsimile (516) 767-0058**  
**Email: building@baxterestates.org**


Date of Application: \_\_\_\_\_  
Name of Applicant: \_\_\_\_\_ Telephone: \_\_\_\_\_  
Address of Applicant: \_\_\_\_\_ Email: \_\_\_\_\_  
Location of Proposal Work: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Show distance to nearest cross road and name of road:  
\_\_\_\_\_  
\_\_\_\_\_

Opening of side of road: ( N. E. S. W.) \_\_\_\_\_  
No. of Openings: \_\_\_\_\_ Size: \_\_\_\_\_  
Type of Pavement: \_\_\_\_\_ Width: \_\_\_\_\_ Shoulder: \_\_\_\_\_  
Type of Sidewalk: \_\_\_\_\_ Width: \_\_\_\_\_  
Show location of Line being tapped: Same side: Yes \_\_\_\_\_ No \_\_\_\_\_  
Purpose of Application: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

SKETCH OF LOCATION

DRAWN IN NORTH ARROW

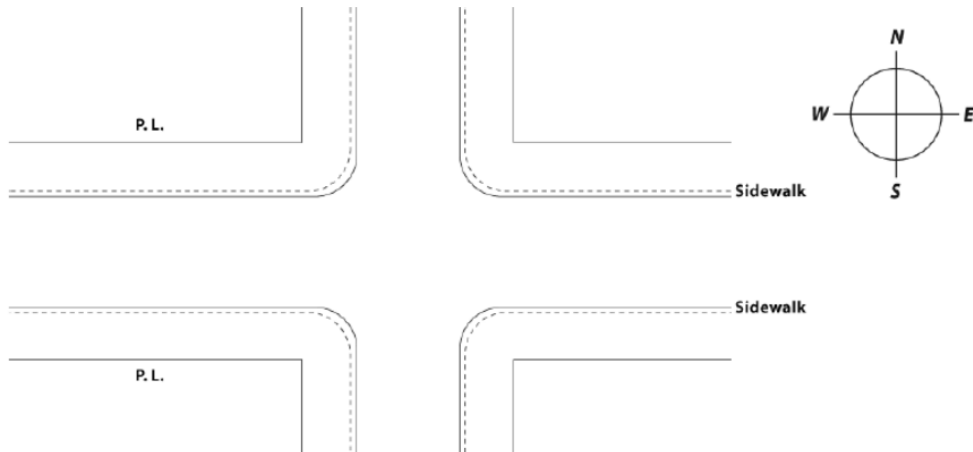

Case No.: \_\_\_\_\_

Permit fee: \$350.00

Surety Bond filed with Village: \$5000.00

Signature: \_\_\_\_\_ Title: \_\_\_\_\_

**VILLAGE OF BAXTER ESTATES  
315 MAIN STREET  
PORT WASHINGTON, NY 11050  
Telephone (516) 767-0096  
Facsimile (516) 767-0058  
Email: [building@baxterestates.org](mailto:building@baxterestates.org)**

**VILLAGE OF BAXTER ESTATES  
PAVEMENT SPECIFICATIONS FOR STREET OPENINGS**

1. **BACKFILLING.** All material used in backfilling operations shall be clean bank run sand and gravel or granular crushed stone. Material shall be free of construction debris or organic material. Backfilling shall be installed in 12” layers with each layer mechanically compacted to 90% of optimum density. The use of excavated material is subject to approval by the Village Building Department.
2. **BASE COURSE.** Concrete with strength of 3500 PSI at 28 days shall be installed to a thickness of 6” as a base course. The top of the concrete shall be set at 2” below the finished road surface.
3. **FINISH COURSE.** Nassau county type 36D or 36E asphaltic concrete shall be used as a finish course with a thickness of 2” after compaction. The finish course shall be cut back 1’ – 0” on all sides of the street opening where the existing road base is concrete.
4. All street openings shall be rectilinear in shape unless otherwise approved by the Village Building Department.
5. All joints between new and existing asphaltic concrete shall be sealed with an application of a hot bituminous sealer.
6. All work shall be in accordance with the Nassau County Department of Public Works standard specifications for the construction of highways and bridges.
7. All work shall be guaranteed for a period of one year after completion and acceptance by the village.
8. Fees for street openings are as follows:
  - a. \$15.00 for an individual opening of 16 sq. ft. or less
  - b. \$3.00 per lineal foot for trench type openings.
9. All contractors shall provide a bond in an amount and form satisfactory to the village before the commencement of any construction activity.
10. Street opening construction shall be arranged to provide for pedestrian and vehicular access to all residential and commercial properties between the hours of 4:00 pm and 8:00 am weekdays and 24 hours a day on Saturdays, Sundays and legal holidays.
11. Work shall not commence on any street opening that will block pedestrian and/or vehicular access to residential or commercial property without prior 72 hour notice to the village and the effected property owners. Contractors shall provide 48 hour notice for all other street opening construction. Contractors conducting emergency repairs shall notify the village and file for the required permits with 24 hours of the commencement of construction.
12. Standard safety barricades and emergency illumination shall be installed at all street openings as required for the protection of pedestrian and vehicular traffic.